

13 February 2025

Environmental Protection Department
The EIA Ordinance Register Office
27/F Southorn Centre,
130 Hennessy Road,
Wanchai, Hong Kong

By email

Attn: Ms Tiffany Cheung / Environmental Protection Officer (Territory South)23

Dear Madam,

Odour Monitoring Report (October 2024) for Harbour Area Treatment Scheme Stage 2A (Operational Phase)

In compliance with sections 2.38 and 2.41 of the EM&A Manual, we are submitting the Odour Monitoring Report (October 2024) for the Harbour Area Treatment Scheme Stage 2A (Operational Phase) for your review.

If you have any questions or require further information, please feel free to contact me or Mr. Dickson WONG at Tel. 2195 3462, email: leontppun@dsd.gov.hk or dicksonstwong@dsd.gov.hk.

Yours faithfully,

CMA Industrial Development Foundation Limited

PUN Tsz Ping, Leon

Environmental Consultant

Encl.

cc Chemist/ST2/2, DSD

Mr. K. F. LEE

By Email

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

Report No.: OT_2024004

Prepared by:

WONG Shing Tat, Dickson

Environmental Consultant

Reviewed by:

PUN Tsz Ping, Leon

Environmental Consultant

Table of Contents

1. Inti	roduction	4
1.1.	Background	4
1.2.	Objectives of the Monitoring	4
1.3.	Objectives of the Report	4
2. Ode	our Patrol	5
2.1.	Monitoring Requirement	5
2.2.	Monitoring Frequency	5
2.3.	Monitoring Location	5
2.4.	Monitoring Parameters	7
3. Ode	our Patrol Monitoring Result	9
3.1.	Odour Intensity	9
3.2.	Meteorological Conditions	11
3.3.	Odour Patrol Result Discussion	11
4. Sun	nmary of Odour Patrol Result	14
4.1.	Conclusion	14
4.2.	Recommendations	14
4.3.	Exceedance	14
5. Ode	our Measurement	16
5.1.	Monitoring Requirement	16
5.2.	Monitoring Frequency	18
5.3.	Monitoring Location	18
5.4.	Monitoring Parameter	19
6. Ode	our Measurement Result	20
6.1.	Odour Concentration and Odour Emission Rate	20
6.2.	Odour Measurement Result Discussion	21
7. Sun	nmary of Odour Measurement	22
7.1.	Conclusion	22
7.2.	Recommendation	22
7.3.	Correlation between Odour and H ₂ S Concentration	22

List of Tables

Table 2.1	Odour Patrol Monitoring Locations
Table 2.2	Odour Patrol Monitoring of site boundary Locations
Table 2.3	Description of Odour Intensity Levels
Table 3.1	Summary of the Odour Patrol Results
Table 3.2	Action / Limit Levels of the Odour Patrol
Table 3.3	Comparison between Baseline Data and Impact Data of Odour Patrol
Table 4.1	Event/Action Plan for Operation Air Quality Monitoring
Table 5.1	Odour Monitoring Locations for Odour Measurement
Table 6.1	Summary of Odour Emission Rate
Table 6.2	Comparison between Impact Monitoring Data and Data Obtained from EIA
Table 6.3	Action / Limit Levels of the Odour Measurement
Table 7.1	In-house H ₂ S Concentration from Sensors and Odour Concentration from
	Odour Measurement for October 2024

List of Appendices

Appendix A	Layout of Odour Patrol Monitoring Locations
Appendix B	Odour Certificates
Appendix C	Field Record and Photo Record
Appendix D	Meteorological Information from the Hong Kong Observatory Station
Appendix E	Layout of Odour Monitoring Locations for Odour Measurement
Appendix F	Odour Measurement Result
Appendix G	Total Odour Emission Rate Extracted from EIA Report
Appendix H	Investigation Report
Annex 1	Field Record and Photo Record for Additional Odour Patrol on 22 nd November
	2024

List of Graphs

Graph 1	Overall Correlation between Odour and H ₂ S Concentration
Graph 2	Correlation between Odour and H ₂ S Concentration for Jul 2024 and Oct 2024

1. Introduction

1.1. Background

- 1.1.1. Drainage Services Department appointed ALS Technichem (HK) Pty Limited ("ALS") and CMA Industrial Development Foundation ("CMA") to undertake the Odour Monitoring for the Operational Phase of the Harbour Area Treatment Scheme Stage 2A (hereafter referred to as "the Project").
- 1.1.2. The Project is reference to Environmental Permit No. EP-322/2008/G issued on 9th May 2014 by the Environmental Protection Department (hereafter called EPD) to the Drainage Services Department (hereafter called the DSD) as the Permit Holder and the Environmental Monitoring and Audit ("EM&A") Manual for the Harbour Area Treatment Scheme ("HATS") Stage 2A.
- 1.1.3. The odour measurement and odour patrol shall be conducted in the first five years upon commissioning of the expanded SCISTW. For the 1st year, odour monitoring shall be conducted every three months. For the 2nd to 5th year, if the monitoring results from the 1st year comply with the requirements stated in Section 2.38 and Section 2.41 of EM&A Manual, the frequency of the monitoring could be reduced to once every 6 months subject to EPD's approval.

1.2. Objectives of the Monitoring

1.2.1. The objective of odour patrol and odour measurement is to compare the result obtained from the operational phase with the baseline data at the designated points in order to determine the impact from the operation.

1.3. **Objectives of the Report**

1.3.1. The purpose of the odour monitoring report for the operational phase is to provide analysis and graphical presentation to determine if there are any changes of odour impacts with respect to the implementation of HATS Stage 2A.

2. Odour Patrol

2.1. **Monitoring Requirement**

- 2.1.1. An odour patrollist with at least 3 independent trained personnel / competent persons, will be provided to conduct the odour patrol work at 23 designated odour monitoring locations and at the site boundary of 8 Preliminary Treatment Works (PTW) and the Stonecutters Island Sewage Treatment Works (SCISTW). The patrollist will be "calibrated" with reference to European Standard Method: BS EN13725 to ensure the patrollist odour sensitivity within 20-80 ppb/V. The Odour Certificates are shown in **Appendix B**.
- 2.1.2. The monitoring shall not be conducted on rainy days. Meteorological conditions including ambient temperature, relative humidity, wind speed and wind direction will be recorded with photo showing the sampling locations during each monitoring.
- 2.1.3. The independent trained personnel / competent persons shall:
 - have their individual odour threshold of n-butanol in nitrogen gas in the range of 20 to 80 ppb/v required by the European Standard Method (EN 13725).
 - be at least 16 years of age and willing and able to follow instructions.
 - be free from any respiratory illnesses.
 - be engaged for a sufficient period to build up and monitor/detect at several monitoring locations;
 - not be allowed to smoke, eat, drink (except water) or use chewing gum or sweets 30 min before and during odour intensity analysis;
 - take great care not to cause any interference with their own perception or that of others by lack of personal hygiene or the use of perfumes, deodourants, body lotions or cosmetics;
 - not communicate with each other about the results of their choices.

2.2. **Monitoring Frequency**

2.2.1. Odour Patrol shall be conducted every three months for the first year of operation for 8 PTWs and expended SCISTW. The first odour monitoring shall be conducted within one month, after the operation of the upgraded PTWs and expended SCISTW. Subsequent odour monitoring shall be conducted at the 4th, 7th and 10th month.

2.3. **Monitoring Location**

2.3.1. According to section 2.23 of the EM&A Manual, odour patrol monitoring will be conducted at (1) the odour monitoring locations listed in **Table 2.1** and at (2) the site boundary of 8 PTWs and SCISTW listed in **Table 2.2**.

2.3.2. The layout of odour patrol monitoring locations is shown in **Appendix A**.

Table 2.1 Odour Patrol Monitoring Locations

ASR ID in EIA Report*	Monitoring Station ID	Location	
NP3	OM_NP1	King's Road Playground & Skating Area	
NP4	OM_NP2	Customs HQ Tower	
NP5	OM_NP3	K. Wah Centre	
WC3	OM_WC1	Society for the Prevention of Cruelty to Animals	
WC4	OM_WC2	Rest Garden near Wan Chai Interchange	
C1	OM_C1	Sheung Wan Fire Station	
C2	OM_C2	Water Front Divisional Police Station	
C3	OM_C3	Sheung Wan Gala Point	
FM2	OM_FM1	Western Wholesale Food Market	
SB1	OM_SB1	University of Hong Kong Stanley Ho Sports Centre Pitch	
SB2	OM_SB2	Home for the Elderly	
SB3	OM_SB3	Maclehose Medical Rehabilitation Centre	
SB4	OM_SB4	The Duchess of Kent Children's Hospital	
CB1	OM_CB1	Cyber Centre	
CB2	OM_CB2	Le Meridien Cyberport	
WF2	OM_WF1	Wah Ming House, Wah Fu Estate	
AB4	OM_AB1	Dairy Farm Ice and Cold Storage	
ALC3	OM_ALC1	Shell Ap Lei Chau Depot	
SCI1	OM_SCI1	Government Dockyard Offices	
SCI3	OM_SCI2	COSCO Hit Terminal	
SCI4	OM_SCI3	KMB Depot Office	
SCI5	OM_SCI4	Planned FSD Diving Rescue and Diving Training Centre	
SCI6	OM_SCI5	Club House	

Remark:

^{*} EIA Report reference from Agreement No. CE 43/2005 (EP) Harbour Area Treatment Scheme (HATS) Stage 2A EIA Study – Investigation, Final EIA Report, 3 Air Quality, Table 3.4.

Table 2.2 Odour Patrol Monitoring of site boundary Locations

Monitoring Location		
North Point PTW Boundary		
Wan Chai East PTW Boundary		
Central PTW Boundary		
Sandy Bay PTW Boundary		
Cyberport PTW Boundary		
Wah Fu PTW Boundary		
Aberdeen PTW Boundary		
Ap Lei Chau PTW Boundary		
SCISTW Boundary Location A		
SCISTW Boundary Location A1		
SCISTW Boundary Location B		
SCISTW Boundary Location C		
SCISTW Boundary Location D		

2.4. **Monitoring Parameters**

- 2.4.1. During the patrolling, the meteorological and surrounding information are recorded:
 - the prevailing weather condition;
 - the wind direction;
 - the wind speed;
 - location where odour is spotted;
 - source of odour;
 - perceived intensity of the odour;
 - duration of odour; and
 - characteristics of the odour detected
 - some relevant meteorological data such as daily average temperature, and daily average humidity, on the day of odour patrol should be obtained from the nearest Hong Kong Observatory station for reference.

2.4.2. The perceived intensity is to be divided into 5 levels which are ranked in a descending order as shown in **Table 2.3**.

 Table 2.3 Description of Odour Intensity Levels

Odour Level	Odour Intensity	Classification Criteria	
0	Not detected	No odour perceives or an odour so weak that it cannot be easily characterised or described	
1	Slight	Slight identifiable odour, and slight chance to have odour nuisance	
2	Moderate	Moderate identifiable odour, and moderate chance to have odour nuisance	
3	Strong	Strong identifiable, likely to have odour nuisance	
4	Extreme	Extreme severe odour, and unacceptable odour level	

3. Odour Patrol Monitoring Result

3.1. **Odour Intensity**

3.1.1. The odour patrol monitoring result on 29th October 2024 is summarized in **Table 3.1**. The field records and photo records at the ASRs during the patrols are attached in **Appendix C**.

 Table 3.1 Summary of the Odour Patrol Results

	Odour Intensity (0 to 4)			
Monitoring Location	Odour Patrol Member			
	O-1	O-2	O-3	O-Mean
OM_NP1	0	0	0	<u>0</u>
OM_NP2	0	0	0	<u>0</u>
OM_NP3	0	0	0	<u>0</u>
North Point PTW Boundary	0	0	0	<u>0</u>
OM_WC1	0	0	0	<u>0</u>
OM_WC2	0	0	0	<u>0</u>
Wan Chai East PTW Boundary	1#	1#	1#	<u>1</u> #
OM_C1	0	0	0	<u>0</u>
OM_C2	0	0	0	<u>0</u>
OM_C3	0	0	0	<u>0</u>
Central PTW Boundary	1#	1#	1#	<u>1</u> #
OM_FM1	0	0	0	<u>0</u>
OM_SB1	0	0	0	<u>0</u>
OM_SB2	0	0	0	<u>0</u>
OM_SB3	0	0	0	<u>0</u>
OM_SB4	0	0	0	<u>0</u>
Sandy Bay PTW Boundary	2#	2#	2#	<u>2</u> #

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

	Odour Intensity (0 to 4)			
Monitoring Location	Odour Patrol Member			
	0-1	O-2	0-3	O-Mean
OM_CB1	0	0	0	<u>0</u>
OM_CB2	0	0	0	<u>0</u>
Cyberport PTW Boundary	0	0	0	<u>0</u>
OM_WF1	0	0	0	<u>0</u>
Wah Fu PTW Boundary	1#	1#	1#	<u>1</u> #
OM_AB1	0	0	0	<u>0</u>
Aberdeen PTW Boundary	1#	1#	1#	<u>1</u> #
OM_ALC1	0	0	0	<u>0</u>
Ap Lei Chau PTW Boundary	2#	1#	1#	<u>1</u> #
OM_SCI1	0	0	0	<u>0</u>
OM_SCI2	0	0	0	<u>0</u>
OM_SCI3	0	0	0	<u>0</u>
OM_SCI4	0	0	0	<u>0</u>
OM_SCI5	0	0	0	<u>0</u>
SCISTW Boundary Location A	1#@	1#@	1#@	1#@
SCISTW Boundary Location A1	1#	0	0	<u>0</u>
SCISTW Boundary Location B	0	0	0	<u>0</u>
SCISTW Boundary Location C	2@	2 [@]	2 [@]	<u>2</u> @
SCISTW Boundary Location D	1	1	0	1

Remark:

- 1. # The odour was detected with sewage or urine characteristics.
- 2. @The odour was detected with garbage characteristics.

3.2. **Meteorological Conditions**

3.2.1. The meteorological conditions (including temperature, wind speed, wind direction, relative humidity) from the nearest Hong Kong Observatory's Weather Stations for each of the odour patrols were provided for reference in **Appendix D**.

3.3. Odour Patrol Result Discussion

3.3.1. Generally, the odour intensities detected around the SCISTW and PTWs ranged from level 0 to level 2. A level 2 intensity was recorded at two monitoring locations, Sandy Bay PTW Boundary and Location C of the SCISTW site boundary. With reference to the Action/Limit Level shown in **Table 3.2**, the location met the action level.

3.3.2. SCISTW Site Boundary

However, a distinct garbage odour was detected at Location C of the SCISTW site boundary, and the nearby West Kowloon Refuse Transfer Station was identified as the potential source of odour. Therefore, it was concluded that the exceedance is unrelated to the project.

3.3.3. Sandy Bay PTW Boundary

A distinct sewage odour was detected within the Sandy Bay PTW Boundary and was accompanied by a continuous downwind. It was identified that the operation of loading the removed screening waste and grit onto vehicles at Sandy Bay PTW was taking place, which may be one of the factors associated with the detected sewage characteristics. Due to inconclusive results, an odour patrol at this location is proposed to confirm the significance of the odour nuisance from Sandy Bay PTW and determine if it is an isolated incident. Please see **Appendix H** for the investigation report.

Table 3.2 Action / Limit Levels of the Odour Patrol

Parameter	Action	Limit	
Odour Nuisance	Odour Intensity of 2 is measured from odour patrol	Odour Intensity of 3 or above is measured from odour patrol	

3.3.4. By comparing our impact monitoring data with the baseline monitoring data, generally, there were no significant difference between two sets of data. A summary table was shown in **Table 3.3**.

Table 3.3 Comparison between Baseline Data and Impact Data of Odour Patrol

Monitoring	Operational Phase Baseline*	Operational Phase Impact^	
Location	Odour Intensity (0 to 4)		
OM_NP1	0	0	
OM_NP2	0	0	
OM_NP3	0	0	
North Point PTW Boundary	0	0	
OM_WC1	0	0	
OM_WC2	0	0	
Wan Chai East PTW Boundary	0	1#	
OM_C1	0	0	
OM_C2	0	0	
OM_C3	0	0	
Central PTW Boundary	0	1#	
OM_FM1	0	0	
OM_SB1	0	0	
OM_SB2	0	0	
OM_SB3	0	0	
OM_SB4	0	0	
Sandy Bay PTW Boundary	0	2#	
OM_CB1	0	0	
OM_CB2	0	0	
Cyberport PTW Boundary	0	0	

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

Monitoring	Operational Phase Baseline*	Operational Phase Impact^	
Location	Odour Intensity (0 to 4)		
OM_WF1	0	0	
Wah Fu PTW Boundary	0	1#	
OM_AB1	0	0	
Aberdeen PTW Boundary	0	1#	
OM_ALC1	0	0	
Ap Lei Chau PTW Boundary	0	2#	
OM_SCI1	0	0	
OM_SCI2	0	0	
OM_SCI3	1	0	
OM_SCI4	0	0	
OM_SCI5	0	0	
SCISTW Boundary Location A	1	1#@	
SCISTW Boundary Location A1	1	1#	
SCISTW Boundary Location B	2	0	
SCISTW Boundary Location C	3	2 [@]	
SCISTW Boundary Location D	1	1#	

Remarks:

- 1. *The Largest Data throughout the baseline period are extracted.
- 2. ^ The Largest Data among the three Odour Patrol Member are extracted.
- 3. # The odour was detected with sewage or urine characteristics.
- 4. @ The odour was detected with garbage characteristics.

4. Summary of Odour Patrol Result

4.1. **Conclusion**

4.1.1. In general, the odour patrol results were similar to the baseline data. No exceedance of the action level was recorded at the 23 designated odour monitoring locations and the site boundary of 8 PTWs and SCISTW, except for Sandy Bay PTW Boundary and SCISTW Boundary Location C. The exceedance at Sandy Bay PTW Boundary may be attributed to the operation of loading the removed screening waste and grit onto vehicles, while SCISTW Boundary Location C was found to be associated with the garbage characteristics in the vicinity of nearby West Kowloon Refuse Transfer Station.

4.2. **Recommendations**

4.2.1. Based on the odour patrol results, it is recommended to take more attention on 8 PTWs and SCISTW, except for Cyberport PTW and North Point PTW. These sites have indicated the detection of Level 1 to Level 2 odour intensity with sewage characteristics in their respective regions, which suggesting the potential occurrence of odour nuisance events. The attention aimed to ensure the odour nuisance would not be deteriorated.

4.3. **Exceedance**

- 4.3.1. There was two action level exceedance recorded at Sandy Bay PTW Boundary and SCISTW Boundary Location C.
- 4.3.2. The Investigation Reports from January, April, July, and October 2022 confirmed that the odour exceedances at Locations C of the SCISTW site boundary were caused by the West Kowloon Refuse Transfer Station. Therefore, no action is required for these locations as the exceedances were caused by the West Kowloon Refuse Transfer Station, which is not related to the project.
- 4.3.3. **Table 4.1** showed the Event/Action Plan for Operation Air Quality Monitoring.
- 4.3.4. According to the event and action plan, the reason / source of exceedance should be first identified. The investigation report is attached in **Appendix H**.

 Table 4.1 Event/Action Plan for Operation Air Quality Monitoring

	Action			
Event	Person-in-charge of Odour Monitoring	DSD		
Action Level				
Exceedance of action level	 Identify source/reason of exceedance; Repeat odour patrol to confirm finding; Repeat odour measurement at exhaust stacks of deodourization system of SCISTW (if exceedance at SCISTW) to confirm finding. 	within 2 weeks;		
Limit Level				
Exceedance of Limit level	 Identify source / reason of exceedance; Repeat odour patrol to confirm finding; Repeat odour measurement at exhaust stacks of deodourization system of SCISTW (if exceedance at SCISTW) to confirm finding; Increase monitoring frequency to monthly; If exceedance stops, cease additional monitoring. 	the source/reason of exceedance. Investigation shall be completed within 2 weeks; 2. Rectify any unacceptable practice;		

5. Odour Measurement

5.1. **Monitoring Requirement**

5.1.1. Air samples will be collected by passive sampling technique at the odour monitoring station. A NalophanTM sampling bag will be placed inside an airtight sampler and then drawn to vacuum for sampling. Approximately 60 litres of the gas sample is collected into the sampling bag for testing. A diagram of the passive sampling equipment that will be used for the sampling is shown below:



Figure 1: Passive Sampler




Figure 2: A Schematic Diagram of Sampling Device

- 5.1.2. Air samples in Nalophane bags shall be kept in cool condition not under direct sunlight exposure during the collection. If any condensate is observed on the inner surface of the sampled bag, the sample shall be discarded.
- 5.1.3. All samples collected during the sampling day shall be returned to laboratory at the same day. All olfactometry testing shall be conducted and finished within 24 hours after sampling.
- 5.1.4. The selected laboratory is the local laboratory for the measurement of odour concentration following the European Standard Method BS EN13725:2003 (by dynamic olfactometry). The Reporting Limit for the Olfactometry Analysis is 11 OUE/m³.

- Odour concentration of the sample is determined by Forced-choice Dynamic Olfactometer in accordance to European Standard Method: BS EN13725:2003.
- Testing should be performed by five qualified panellists who have been trained and complied with the requirement of the European Standard Method: BS EN13725:2003 in the range of 20 to 80 ppb/v and a standard deviation of R < 2.3.
- Testing shall be started immediately after sample receipt and all testing to be completed with 24 hours after sampling.
- 5.1.5. The odour concentration is measured by determining the dilution factor required to reach the detection threshold. The odour concentration at the detection threshold is by definition 1 OUE/m³. The odour concentration is then expressed in terms of multiples of the detection threshold.



Figure 3: Olfactory Laboratory with ScentroidTM SS600 Olfactometer

- 5.1.6. During each odour sampling day, one blank sample should be collected for quality control. The sample will be taken by purging pure nitrogen gas into the odour bag directly on site as a blank sample.
- 5.1.7. All equipment for odour measurement and analysis are maintained and calibrated in according to the requirement of the European Standard Method EN13725.

5.2. **Monitoring Frequency**

5.2.1. Odour measurement shall be conducted every three months for the first year of operation for the expanded SCISTW. The first odour measurement shall be conducted within one month after operation of the expanded SCISTW. Subsequent odour measurement shall be conducted at the 4th, 7th and 10th month.

5.3. **Monitoring Location**

- 5.3.1. According to section 2.36 of the EM&A Manual, odour measurement will be conducted at 15 exhaust stacks of the deodourization system at SCISTW. The odour measurement locations are listed in **Table 5.1**. As suggested by the contractor, the location ID is renamed to better identify the deodourization unit which is different from that on the detailed reporting requirement of odour monitoring report.
- 5.3.2. The layout of odour monitoring locations for odour measurement is shown in **Appendix E**.

Table 5.1 Odour Monitoring Locations for Odour Measurement

Location Point
DOU 1B-1
DOU 1B-2
DOU 1-PS ⁽³⁾
DOU 1-R (2)
DOU 2-PS ⁽⁴⁾
DOU 2PS-ACF (7)
DOU 4-PS ⁽⁵⁾
DOU 5-PS ⁽⁶⁾
DOU 6
DOU 6A
DOU 6B
DOU 8-1
DOU 8-2
DOU 9-1
DOU 9-2

Notes:

(1) DOU means Deodourization Unit.

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

- (2) Replace DOU 4-2 stated in Detailed Reporting Requirement of Odour Monitoring Report (Renaming to distinguish the source of odour is different from that of DOU4)
- (3) Replace DOU 1 stated in Detailed Reporting Requirement of Odour Monitoring Report

 (A polishing stage (PS) is added after the treatment of DOU 1 to enhance odour treatment performance)
- (4) Replace DOU 2 stated in Detailed Reporting Requirement of Odour Monitoring Report

 (A polishing stage (PS) is added after the treatment of DOU 2 to enhance odour treatment performance)
- (5) Replace DOU 4 stated in Detailed Reporting Requirement(A polishing stage (PS) is added after the treatment of DOU 4 to enhance odour treatment performance)
- (6) Replace DOU 5 stated in Detailed Reporting Requirement(A polishing stage (PS) is added after the treatment of DOU 5 to enhance odour treatment performance)
- (7) Replace DOU 3 stated in Detailed Reporting Requirement

 (A polishing stage (PS) DOU 2PS-ACF is added after the treatment of DOU 3 to enhance odour treatment performance.)

5.4. **Monitoring Parameter**

- 5.4.1. During sampling, following items will be recorded:
 - ambient temperature;
 - relative humidity;
 - wind speed;
 - wind direction; and
 - photo showing the sampling locations relative to existing land features.

6. Odour Measurement Result

6.1. Odour Concentration and Odour Emission Rate

- 6.1.1. The odour measurement was conducted on 29th October 2024. The detail of location photo is shown in **Appendix E**.
- 6.1.2. The odour emission rate is listed in **Table 6.1.** The total odour emission rate is calculated to be 791 ou/s. The detail monitoring results for each monitoring location is shown in **Appendix F**.

Table 6.1 Summary of Odour Emission Rate

Location ID	Odour Emission Rate (ou/s)
DOU 1B-1	18
DOU 1B-2	17
DOU 1-PS	135
DOU 1-R	9
DOU 2-PS	104
DOU 2PS-ACF	117
DOU 4-PS	46
DOU 5-PS	51
DOU 6	79
DOU 6A	68
DOU 6B	72
DOU 8-1	10
DOU 8-2	10
DOU 9-1	34
DOU 9-2	21

6.2. Odour Measurement Result Discussion

- 6.2.1. The total odour emission rate presented in EIA Report Table 3.14 are given in Appendix
 G, the design total mitigated odour emission rate is 11,506.21 ou/s for Option 2 –
 Decentralized Design.
- 6.2.2. Comparison between impact monitoring data and data obtained from EIA is shown in **Table 6.2**.

Table 6.2 Comparison between Impact Monitoring Data and Data Obtained from EIA

Total Odour Emission Rate (ou/s)			
Operation Phase Impact	EIA		
791	11,506.21		

6.2.3. According to Table 2.3 of EM&A Manual, the Action / Limit Level is shown in **Table 6.3.** There was no complaint received in October 2024.

Table 6.3 Action / Limit Levels of the Odour Measurement

Parameter	Action	Limit
Odour Nuisance	- When two documented complaints are received; or - Measured total odour mission rate from exhaust tacks of deodourization system at SCSITW ≥ 0.9 x total mitigated odour emission rate presented in EIA Report	- Five or more consecutive genuine documented complaints within a week; or - Measured total odour emission rate from exhaust stacks of deodourization system at SCISTW ≧ Total mitigated

7. Summary of Odour Measurement

7.1. **Conclusion**

7.1.1. The impact total odour emission rate is smaller than the 90% of total mitigated odour emission rate presented in the EIA report (10,355.59 ou/s). The odour measurement is acceptable and no exceedance of total odour emission rate is recorded.

7.2. **Recommendation**

7.2.1. The operator is reminded to maintain the plants and deodourization units are in good condition and to keep a close monitoring on the in-house H₂S sensors to ensure that no odour nuisance is induced by SCISTW.

7.3. Correlation between Odour and H₂S Concentration

7.3.1. To further understand the gas composition, the overall correlation between H₂S concentrations and odour units of available DOUs was plotted in **Graph 1**. In-house H₂S concentration from sensors and odour concentration from odour measurement for October 2024 was listed in **Table 7.1**.

Table 7.1 In-house H₂S Concentration from Sensors and Odour Concentration from Odour Measurement for October 2024

Measurement for October 2024				
Location ID	Portable H ₂ S Equipment Concentration (ppm) *	Odour Concentration (OU/m³)		
DOU 1B-1	<0.001	<11		
DOU 1B-2	<0.001	<11		
DOU 1-PS	<0.001	<11		
DOU 1-R	<0.001	<11		
DOU 2-PS	<0.001	<11		
DOU 2PS-ACF	<0.001	<11		
DOU 4-PS	<0.001	<11		
DOU 5-PS	<0.001	<11		
DOU 6	<0.001	<11		
DOU 6A	<0.001	<11		
DOU 6B	<0.001	<11		

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

Location ID	Portable H ₂ S Equipment Concentration (ppm) *	Odour Concentration (OU/m³)	
DOU 8-1	<0.001	<11	
DOU 8-2	< 0.001	<11	
DOU 9-1	0.146	25	
DOU 9-2	0.037	<11	

Remark:

1. *The reported unit for H₂S concentration were converted from ppb to ppm by calculation.


Overall Correlation between Odour and H₂S Concentration 1,400 Jan-22 1,200 Apr-22 **♦** Jul-22 1,000 Odour Concentration ◆ Oct-22 ▲ Jan-23 $(000/m^{3})$ 800 ▲ Apr-23 600 ▲ Jul-23 △ Oct-23 400 Jan-24 v = 302.71x + 43.604Apr-24 200 Jul-24 Oct-24 0.2 0.3 0.4 0.5 0.6 0.7 0.8 0.1 In-house H₂S Concentration (ppm)

Graph 1 Overall Correlation between Odour and H₂S Concentration

Remark:

1. Data smaller than detection limit would be plotted as zero for graph presentation

7.3.2. According to **Graph 1**, no correlation can be established generally. With the above-mentioned observation, the monitoring results in Jul 2024 and Oct 2024 was similar. It is believed that the fine-tuned operating mode including change of quantities of chemical used at the wet chemical scrubbers and replacement of activated carbon at the activated carbon filters after odour measurement exceedance in Jan 2022 can effectively minimize the odour nuisance. To confirm the correlation between H₂S concentrations and odour units, a graph without exceedance data (data from Jan 2022) should be established. **Graph 2** shows the correlation between Odour and H₂S Concentration for Jul 2024 and Oct 2024.

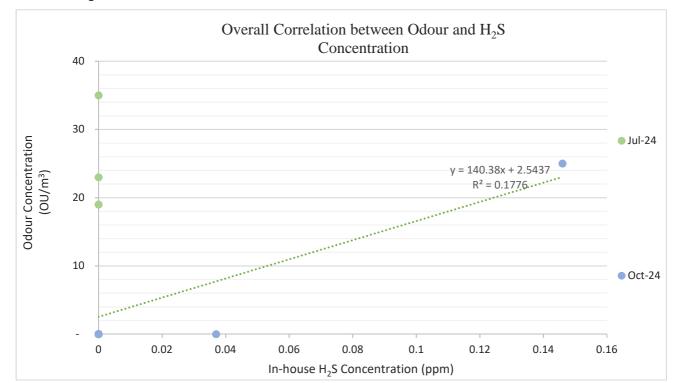

Graph 2 Correlation between Odour and H₂S Concentration for Jul 2024 and Oct 2024

Remark:

- 1. Data smaller than detection limit would be plotted as zero for graph presentation
- 7.3.3. When comparing the data in **Graph 1** with the data for Jul 2024 and Oct 2024 in **Graph 2**, a significant contrast becomes apparent. In **Graph 1**, the majority of the data exhibits high levels of odour concentration with lower H₂S concentration. However, in **Graph 2**, constant variables of odour concentration are observed across different H₂S concentrations, with the odour concentration being consistently below the detection limit or at low concentration levels. Therefore, there is no clear and obvious evidence to suggest H₂S is the major component contributing to the emitted odour from SCISTW. The contrasting patterns between the two graphs suggest the involvement of other factors may influence the odour concentration.
- 7.3.4. Furthermore, the relatively low concentrations of both H₂S and odour observed in October 2024, along with the significant differences in the scales used in the graphs, suggest that the deodorization units are in good condition, effectively mitigating the emission rate of odour in SCISTW.


7.3.5. To conclude, the data from October 2024 indicates that the deodorization units have effectively mitigated the emission rate of odour, resulting in low levels of odour concentration. This highlights the importance of continuous monitoring and maintenance of equipment by operators to ensure the deodorization units maintain good performance. Additionally, it is important to note that the correlation between H₂S and odour concentration may not be significant after the mitigation provided by the deodorization units. The performance of the deodorization units plays a crucial role in reducing odour concentrations, potentially weakening the correlation between H₂S and odour. Therefore, measuring H₂S concentration using sensors could be a more appropriate method for quickly screening the performance of the deodorization units in SCISTW.

-End of Report-


Odour Ma	nitaring R	enort for Harbour	Area Treatment	Scheme Stage 2A	(Operational Phase)	October 2024
Ouvui Mit	յուսլուբ ռ	CDULLIUL HALDUUL	Arca Freaumeni	Scheme Stage 2A	(Obci audilai i nasc)	OCTORET AND

Appendix A


Layout of Odour Patrol Monitoring Locations

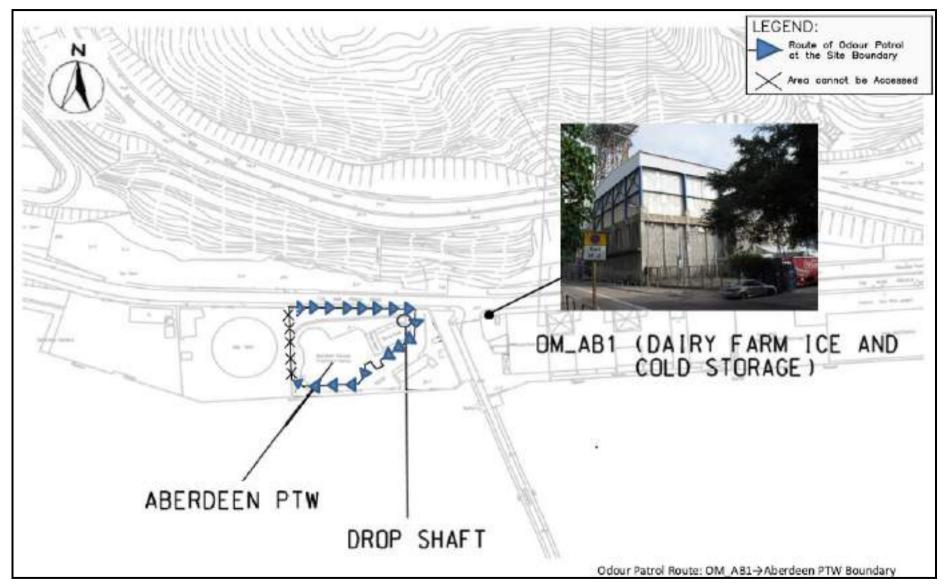


Aberdeen PTW

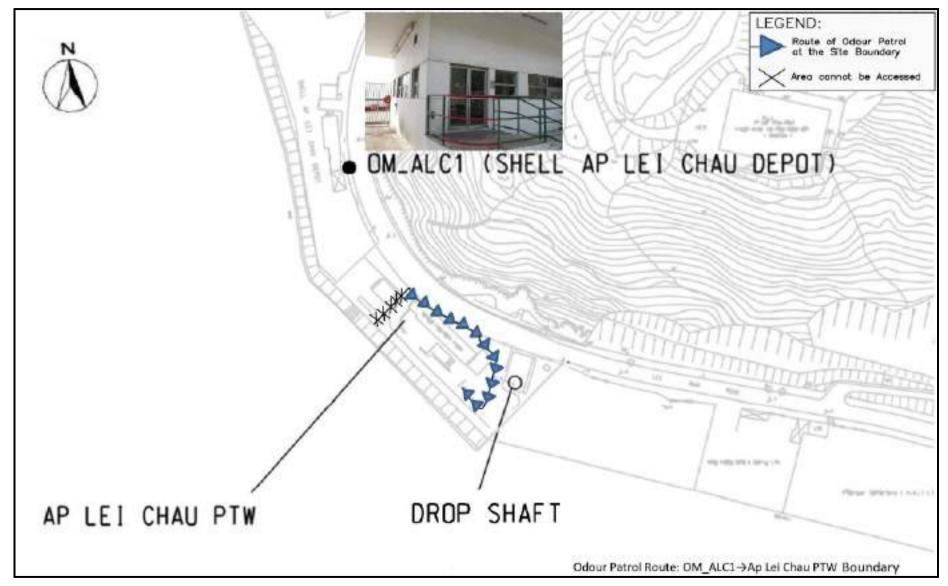


Ap Lei Chau PTW

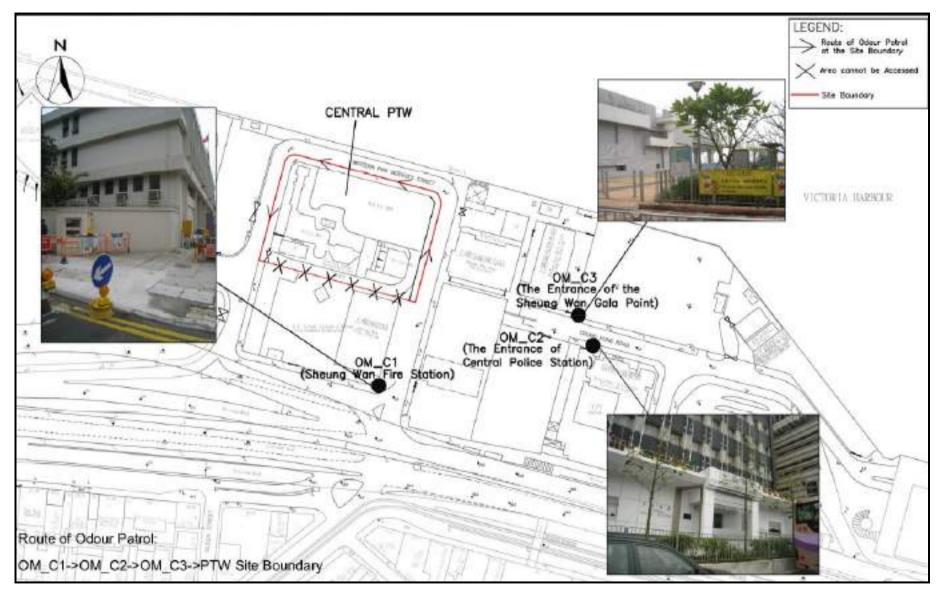


Central PTW

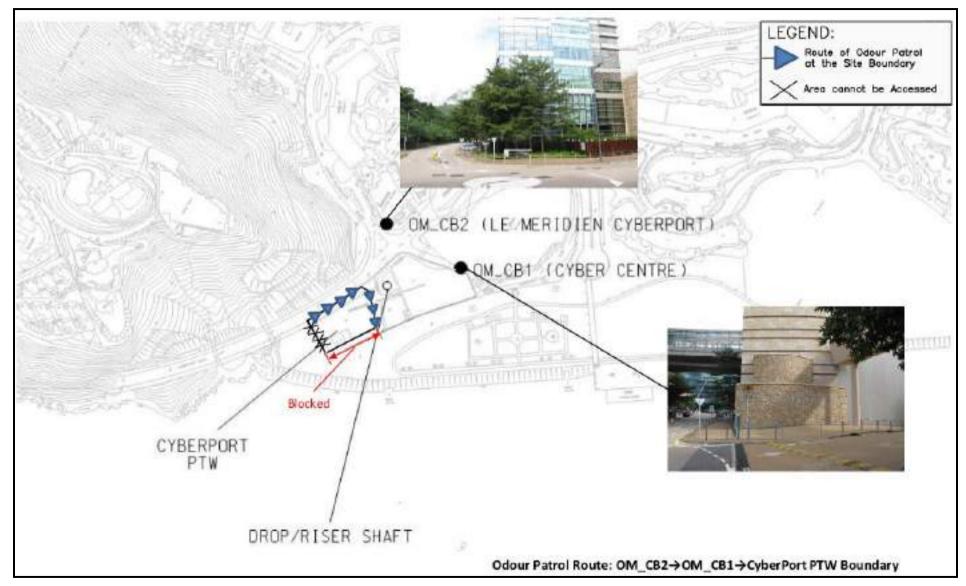


Cybersport PTW

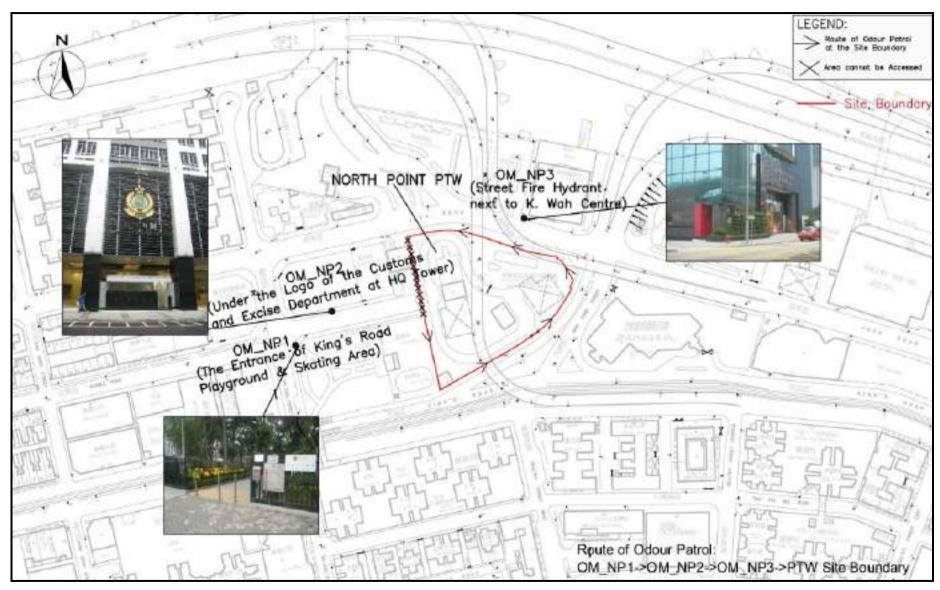


North Point PTW

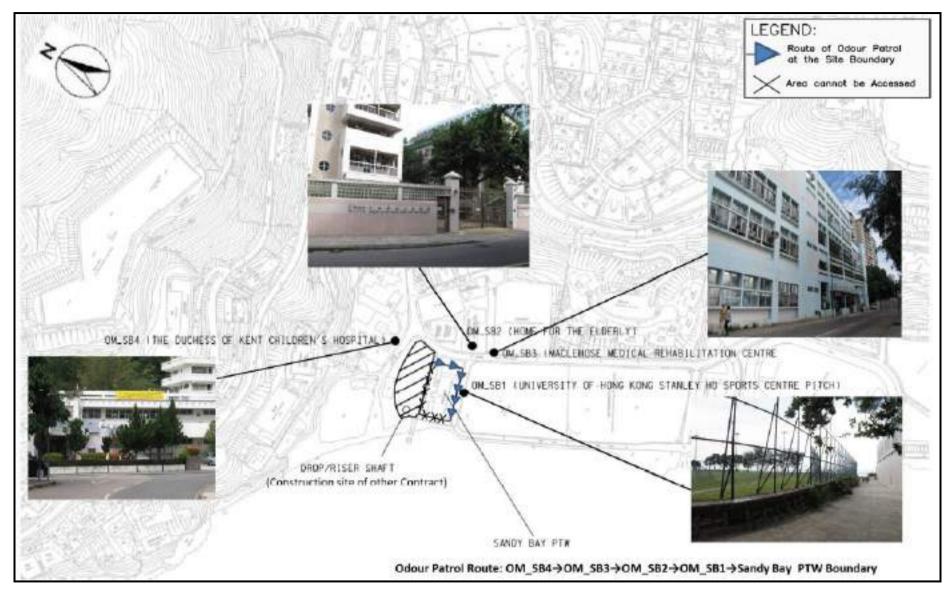


Sandy Bay PTW

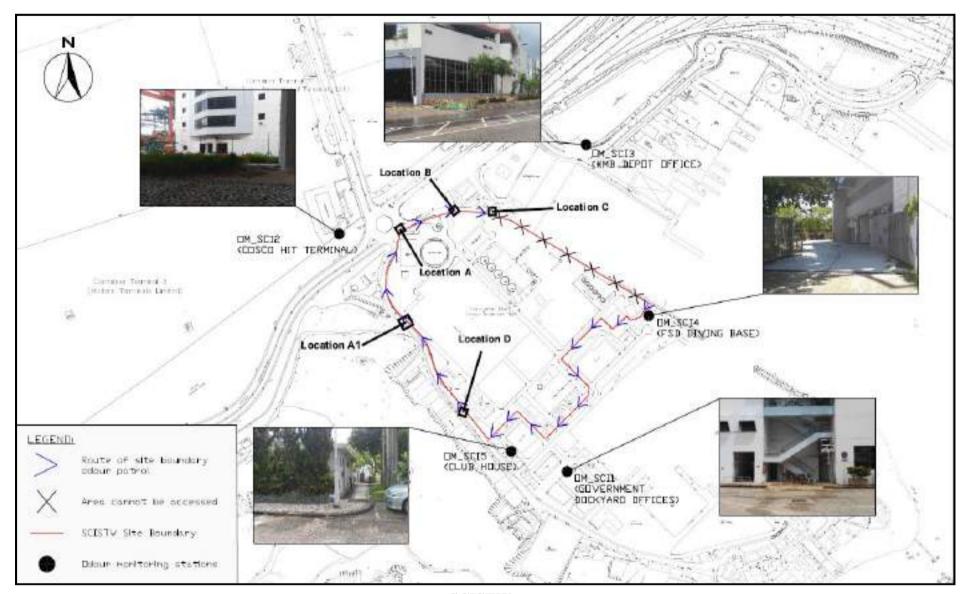


SCISTW

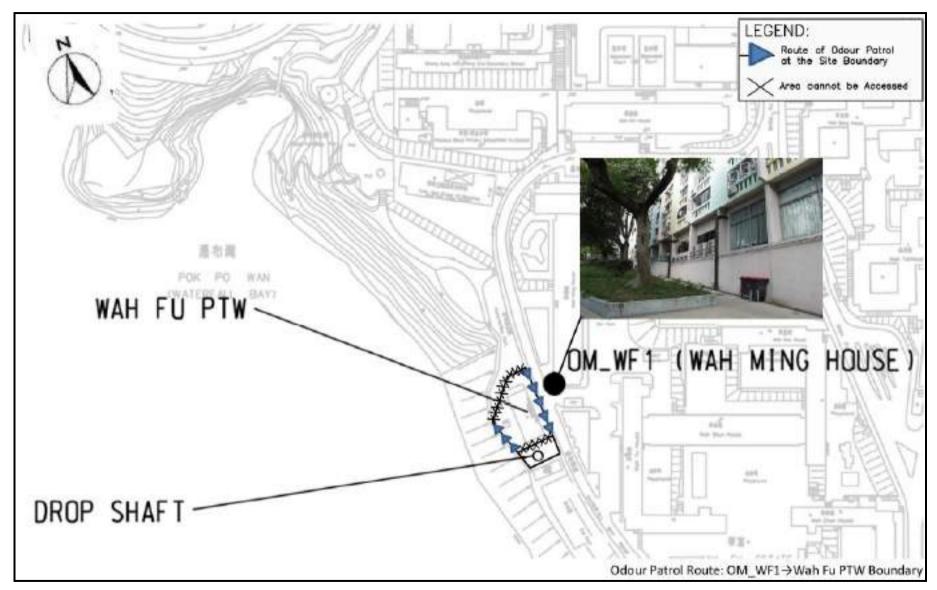

Wah Fu PTW

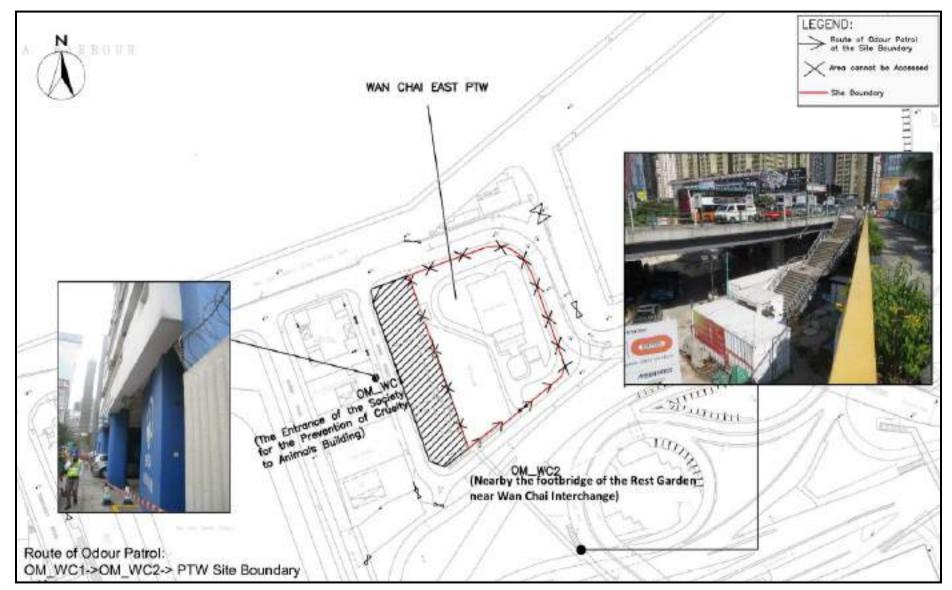

Wan Chai East PTW

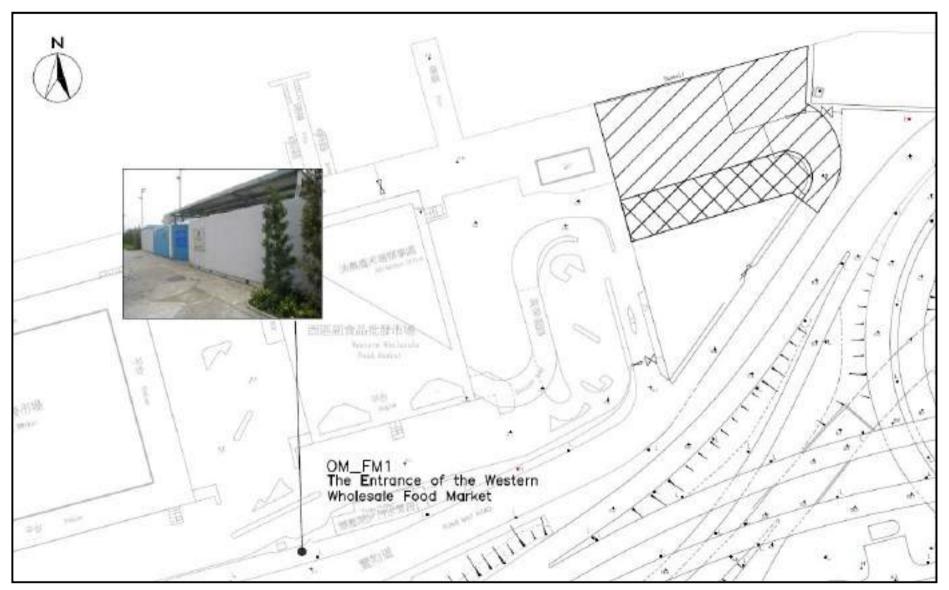

Western Wholesale Food Market

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

Appendix B

Odour Certificates



ALS Life Sciences | Environmental

Certificate No.: C0800-01

Certificate for a Qualified Odour Panellist

This is to certify that

Chen Ci He, Wayne

has participated at least twelve (12) sets of individual N-Butanol screening test during 14-Nov-2023 to 26-Feb-2024

> with Individual Threshold : 42 ppb Standard Deviation : 1.53 ppb

> > and

fulfil the Requirement of the European Standard Method of Air Quality -Determination of Odour Concentration by Dynamic Olfactometry (BS EN 13725:2022) -

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 12 sets of individual threshold estimates and standard deviation less than 2.3

26-February-2024 Issue Date 25-February-2025 Valid Until

Fung Lim Chee, Richard

ALS Technochem 0400 Pty List

11/F Chang Shun Knitting Contre, 1-3 Wing Yap Street, Kwai Chung, NE, Hong Cong.

Tel: 852-2610 1044

RIGHT SOLUTIONS | RIGHT PARTNER



ALS Life Sciences | Environmental

Certificate No.: C0404-01

Certificate for a Qualified Odour Panellist

This is to certify that

Poon Kwong Lun, Allen

has participated in twelve (12) sets of individual N-Butanol screening test during 10-Feb-2023 to 01-Feb-2024

> with Individual Threshold : 43 ppb Standard Deviation : 1.47 ppb

> > and

fulfil the Requirement of the European Standard Method of Air Quality -Determination of Odour Concentration by Dynamic Olfactometry (BS EN 13725:2022) -

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 12 sets of individual threshold estimates and standard deviation less than 2.3

01 February 2024

Issue Date

31 January 2025

Valid Until

Fung Lim Chee, Richard

ALS Technichem (HK) Pty Ltd

11/F Chung Shan Aweting Centre, 1-3 Wing Yo Street: Kwai Chung, NT, Hong Kong.

Tel: 852-2610 1944

RIGHT SOLUTIONS | RIGHT PARTNER



ALS Life Sciences | Environmental

Certificate No.: C0230-01

Certificate for a Qualified Odour Panellist

This is to certify that

Wong Hei Wang

has participated in twelve (12) sets of individual N-Butanol screening test during 24-Oct-2023 to 14-Oct-2024

> : 42 ppb with Individual Threshold : 1.56 ppb Standard Deviation

> > and

fulfil the Requirement of the European Standard Method of Air Quality -Determination of Odour Concentration by Dynamic Olfactometry (BS EN 13725:2022) -

The Requirement of the Odour Threshold of n-Butanol in Nitrogen Gas in the Range of 20 - 80 ppb/v with at least 12 sets of individual threshold estimates and standard deviation less than 2.3

14 October 2024 **Issue Date**

14 October 2025

Valid Until

Fung Lim Chee, Richard

ALS Technichem (HKS Pty Etil)

11/7 Chung Shun Knitting Centre: 1-3 Wing Vip Street, Kasi Chung, NT, Hong Kang

Tel: 852-3610-1044

RIGHT SOLUTIONS | RIGHT PARTNER



Certificate for a Qualified Odour Panel Member

Serial No. : P-047

Odour Panel Member : Andrew Yuen Chun Wa

Date of Screening Test : 13 Aug 2024

15 Aug 2024 19 Aug 2024

Valid Until : 18 Feb 2025

This is to certify that Mr. Andrew Yuen Chun Wa participated in a set of n-butanol screening tests in our laboratory between 13 Aug 2024 and 19 Aug 2024.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 - 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality - Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of

CMA Industrial Development Foundation Limited

Tam Wing Kwun, Winnie

Wimil

Assistant Manager - Environmental Division

Date: 19 Aug 2024



Certificate for a Qualified Odour Panel Member

Serial No. : P-061

Odour Panel Member : Chan Kai Fat

Date of Screening Test : 13 Aug 2024

15 Aug 2024 19 Aug 2024

Valid Until : 18 Feb 2025

This is to certify that Mr. Chan Kai Fat participated in a set of n-butanol screening tests in our laboratory between 13 Aug 2024 and 19 Aug 2024.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 – 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of CMA Industrial Development Foundation Limited

Tam Wing Kwun, Winnie

Wimil

Assistant Manager - Environmental Division

Date: 19 Aug 2024



Certificate for a Qualified Odour Panel Member

Serial No. : P-057

Odour Panel Member : Arnold Keung Chi Young

Date of Screening Test : 13 Aug 2024

15 Aug 2024 19 Aug 2024

Valid Until : 18 Feb 2025

This is to certify that Mr. Arnold Keung Chi Young participated in a set of n-butanol screening tests in our laboratory between 13 Aug 2024 and 19 Aug 2024.

The odour threshold test results of n-butnaol in nitrogen gas was found to be in the range of 20 - 80 ppb/v and a standard deviation of R < 2.3, which comply with the requirement of the European Standard Method of Air Quality – Determination of Odour Concentration by Dynamic Olfactometry (EN 13725).

The participant is Approved and Authorized as Qualified Odour Panel Member for odour patrol and olfactometry analysis.

Signed for and on behalf of CMA Industrial Development Foundation Limited

Tam Wing Kwun, Winnie

Wimil

Assistant Manager - Environmental Division

Date: 19 Aug 2024

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

Appendix C

Field Record and Photo Record

				Temperature H	Relative	Wind					On-Site O	bservation
Location ID	Panellist	Weather	Time	Temperature (°C)	Humidity (%)	Speed (m/s)	Wind Direction	Odour Intensity	Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source
	1							0				
OM_NP1	2	Cloudy	14:24	27.2	62.0	2.2	W	0	NA	NA	NA	NA
	3							0				
	1							0				
OM_NP2	2	Cloudy	14:19	27.2	62.0	0.4	W	0	NA	NA	NA	NA
	3							0				
	1							0				
OM_NP3	2	Cloudy	14:22	26.6	62.0	0.6	W	0	NA	NA	NA	NA
	3							0				
North Point	1							0				
PTW Boundary	2	Cloudy	12:22	28.5	66.6	1.3	NE	0	NA	NA	NA	NA
-	3							0				
	1							0				
OM_WC1	2	Cloudy	14:44	28	64.0	1.0	NW	0	NA	NA	NA	NA
	3							0				
0) () ()	1	GI I		20.2		0.2		0		37.	.	
OM_WC2	2	Cloudy	14:41	28.2	64.0	0.2	NW	0	NA	NA	NA	NA
	3							0				

				Temperature H	Relative	Wind					On-Site O	bservation
Location ID	Panellist	Weather	Time	Temperature (°C)	Humidity (%)	Speed (m/s)	Wind Direction	Odour Intensity	Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source
Wan Chai East	1							1				
PTW Boundary	2	Cloudy	11:58	28.0	79.6	2.8	N	1	Continuous	Side wind	Sewage / Grassy	PTW
	3							1				
	1							0				
OM_C1	2	Cloudy	15:34	28.1	66.0	0.4	W	0	NA	NA	NA	NA
	3							0				
	1							0				
OM_C2	2	Cloudy	15:32	27.3	66.0	0.6	W	0	NA	NA	NA	NA
	3							0				
014.63	1	GI 1	15.01	27.2		0.0	***	0	27.4	27.4	27.4	27.4
OM_C3	2	Cloudy	15:31	27.2	66.0	0.9	W	0	NA	NA	NA	NA
	3							0				
Central PTW	1	Cl. 1	10.12	26.0	70.6	0.4	N 1557	1	G .:	0.1 . 1		DEM
Boundary	2	Cloudy	10:12	26.9	70.6	0.4	NW	1	Continuous	Side wind	Sewage / Grassy	PTW
	3							1				
OM EM1	1	Cloude	15.40	27.1	62.0	0.2	CM	0	NT A	NT A	NT A	NI A
OM_FM1		Cloudy	15:49	2/.1	63.0	0.2	SW		NA	INA	NA NA	NA
OM_FM1	2 3	Cloudy	15:49	27.1	63.0	0.2	SW	0	NA	NA	NA	NA

				Temperature	Relative	Wind					On-Site O	bservation
Location ID	Panellist	Weather	Time	Temperature (°C)	Humidity (%)	Speed (m/s)	Wind Direction	Odour Intensity	Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source
	1							0				
OM_SB1	2	Cloudy	16:11	27.5	63.0	0.6	NW	0	NA	NA	NA	NA
	3							0				
	1							0				
OM_SB2	2	Cloudy	16:10	27.5	63.0	0.4	NW	0	NA	NA	NA	NA
	3							0				
-	1							0				
OM_SB3	2	Cloudy	16:09	27.2	63.0	0.3	NW	0	NA	NA	NA	NA
	3							0				
OM GD4	1	CI 1	16.06	27.2	<i>(2.0</i>	0.4	2111	0	NY A	NY A	27.4	NIA
OM_SB4	2	Cloudy	16:06	27.3	63.0	0.4	NW	0	NA	NA	NA	NA
	3							0				
Sandy Bay	2	Cloudy	10:32	26.9	67.9	1.1	SW	2 2	Continuous	Downwind	Sawaga	PTW
PTW Boundary	3	Cloudy	10.32	20.9	07.9	1.1	S W	2	Continuous	Downwing	Sewage	FIW
	1							0				
OM_CB1	2	Cloudy	16:16	27.7	61.0	0.3	W	0	NA	NA	NA	NA
OM_CB1	3	Cloudy	10.10	21.1	01.0	0.5	**	0	11/1	1471	1417	11/1

				Temperature	Relative	Wind					On-Site O	bservation
Location ID	Panellist	Weather	Time	Temperature (°C)	Humidity (%)	Speed (m/s)	Wind Direction	Odour Intensity	Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source
	1							0				
OM_CB2	2	Cloudy	16:17	27.7	61.0	0.3	W	0	NA	NA	NA	NA
	3							0				
Cyberport PTW	1							0				
Boundary	2	Cloudy	10:44	27.0	74.0	0.8	Е	0	NA	NA	NA	NA
	3							0				
	1							0				
OM_WF1	2	Cloudy	16:27	26.6	60.0	0.2	SW	0	NA	NA	NA	NA
	3							0				
Wah Fu PTW	1							1				
Boundary	2	Cloudy	11:00	26.9	68.8	1.2	N	1	Continuous	Downwind	Sewage	PTW
	3							1				
	1	~						0				
OM_AB1	2	Cloudy	16:39	25.4	60.0	0.2	W	0	NA	NA	NA	NA
	3							0				
Aberdeen PTW	1	C1 - 1	11 14	27.0	C4.0	0.0		1	To the one of the state of	NT A	G	DTW
Boundary	2	Cloudy	11:14	27.8	64.8	0.0	-	1	Intermittent	NA	Sewage	PTW
	3							1				

				Temperature	Relative Humidity	Wind					On-Site O	bservation
Location ID	Panellist	Weather	Time	Temperature (°C)	Humidity (%)	Speed (m/s)	Wind Direction	Odour Intensity	Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source
	1							0				
OM_ALC1	2	Cloudy	16:47	25.5	61.0	0.3	W	0	NA	NA	NA	NA
	3							0				
Ap Lei Chau	1							2				
PTW Boundary	2	Cloudy	11:29	29.2	68.2	0.5	S	1	Intermittent	Side wind	Sewage	PTW
	3							1				
	1							0				
OM_SCI1	2	Cloudy	14:30	30.8	49.0	1.4	N	0	NA	NA	NA	NA
	3							0				
OM GGIA	1	Cl. 1	14.45	22.1	40.0	0.2	N1111	0	NYA	NYA	NYA	374
OM_SCI2	2	Cloudy	14:45	33.1	48.0	0.3	NW	0	NA	NA	NA	NA
	3							0				
OM SCI2	1	C1 1	15.00	20.6	52.0	1.3	NE	0	NA	NT A	NA	NA
OM_SCI3	2	Cloudy	15:00	29.6	52.0	1.3	NE	0	NA	NA	NA	NA NA
	3							0				
OM_SCI4	2	Cloudy	15:15	31.5	48.0	1.6	SE	0	NA	NA	NA	NA
OWI_5C14	3	Cloudy	13.13	31.3	40.0	1.0	SE	0	11/71	INA	11/71	INA

				Temperature	Relative	Wind					On-Site O	bservation
Location ID	Panellist	Weather	Time	Temperature (°C)	Humidity (%)	Speed (m/s)	Wind Direction	Odour Intensity	Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source
	1							0				
OM_SCI5	2	Cloudy	15:30	29.8	52.0	< 0.1	-	0	NA	NA	NA	NA
	3							0				
	1							1				Refuse Collection
SCISTW- Location A	2	Cloudy	9:34	25.9	70.3	1.6	Е	1	Intermittent	Downwind	Rubbish / Sewage	Vehicles for the West Kowloon Refuse Transfer
	3							1				Station / SCISTW
SCISTW-	1							1	Intermittent	Downwind	Sewage	SCISTW
Location A1	2	Cloudy	9:37	27.1	67.0	0.5	N	0	NA	NA	NA	NA
	3							0	1,12		- 1,2 -	
SCISTW-	1							0				
Location B	2	Cloudy	9:32	25.9	67.3	1.6	SW	0	NA	NA	NA	NA
	3							0				

				Temperature	Relative	Wind					On-Site O	bservation
Location ID	Panellist	Weather	Time	Temperature (°C)	Humidity (%)	Speed (m/s)	Wind Direction	Odour Intensity	Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source
	1							2				Refuse Collection
SCISTW- Location C	2	Cloudy	9:29	26.6	67.2	0.6	E	2	Continuous	Downwind	Rubbish	Vehicles for the West Kowloon
	3							2				Refuse Transfer Station
SCISTW	1							1	Intermittent	Downwind	Grassy	Nearby
SCISTW- Location D	2	Cloudy	9:41	26.9	68.3	0.7	NW	1	Intermittent	Downwillu	Grassy	Vegetation
Location D	3							0	NA	NA	NA	NA





OM_NP1 OM_NP2







OM_NP3 North Point PTW Boundary






OM_WC1 OM_WC2

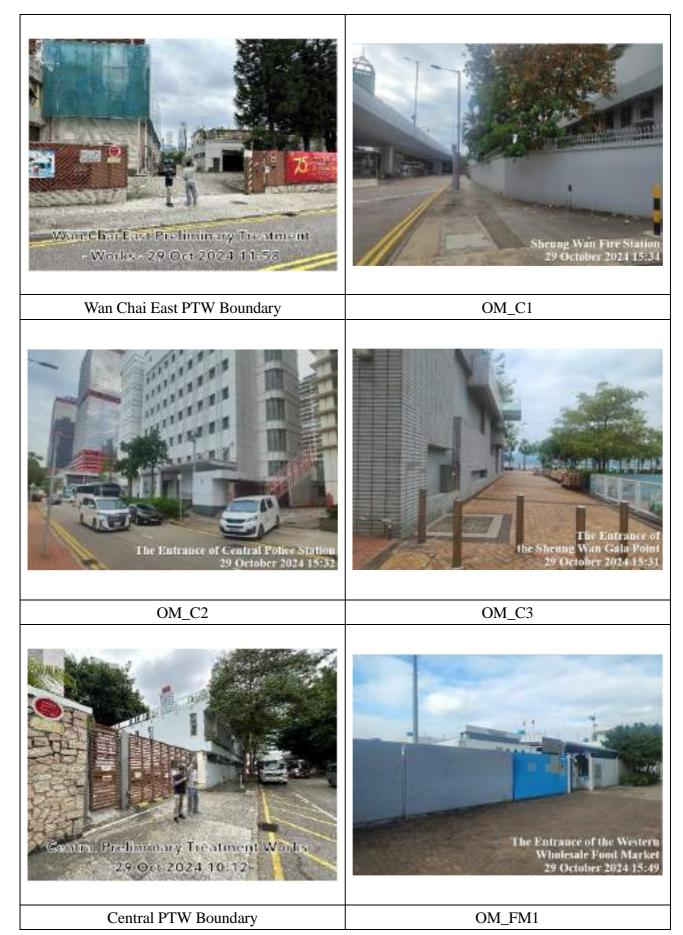

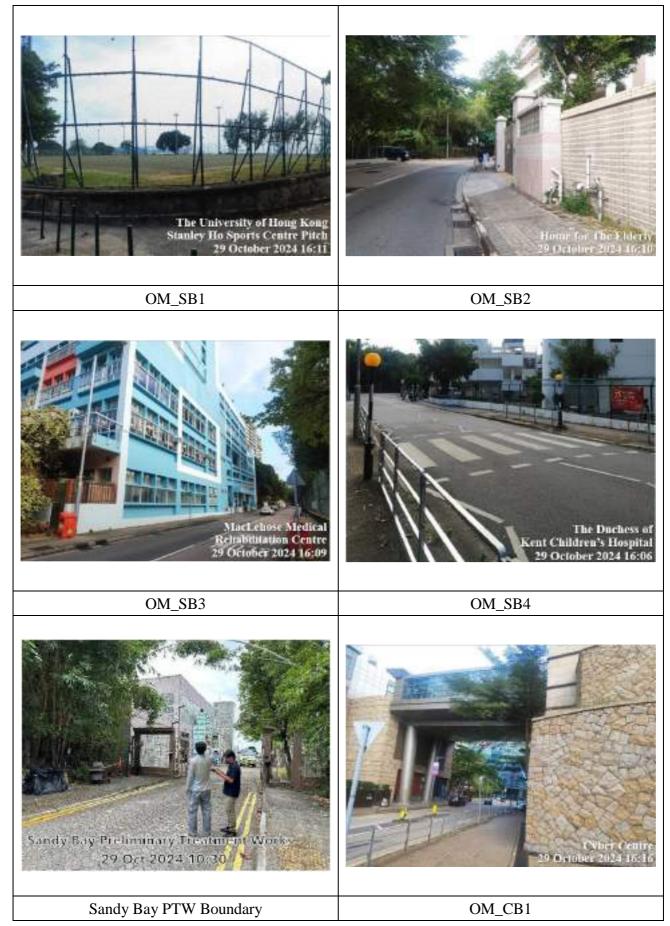

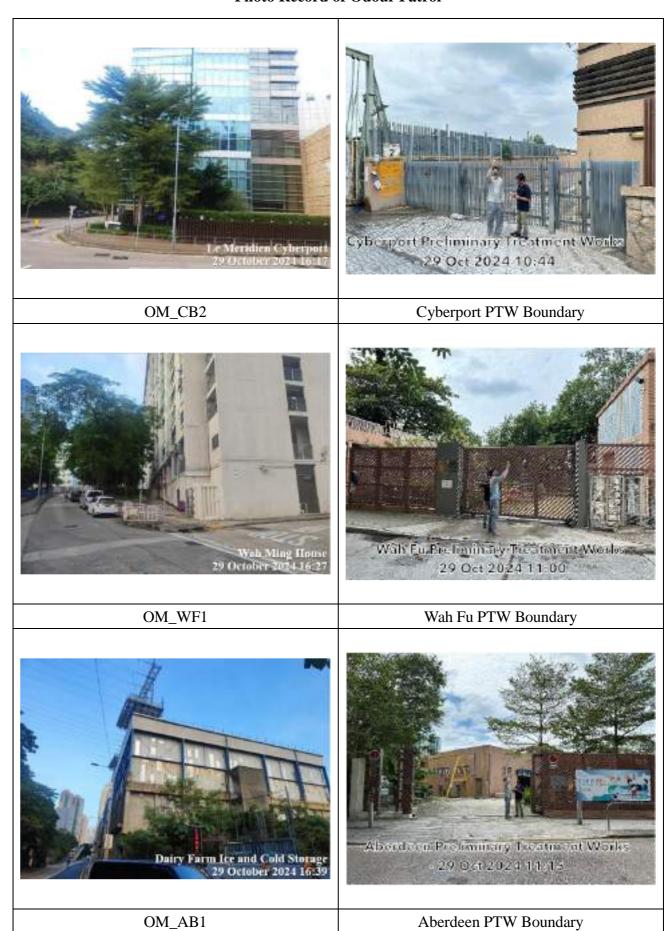





OM_ALC1

Ap Lei Chau PTW Boundary





OM_SCI1


OM_SCI2





OM_SCI3

OM_SCI4

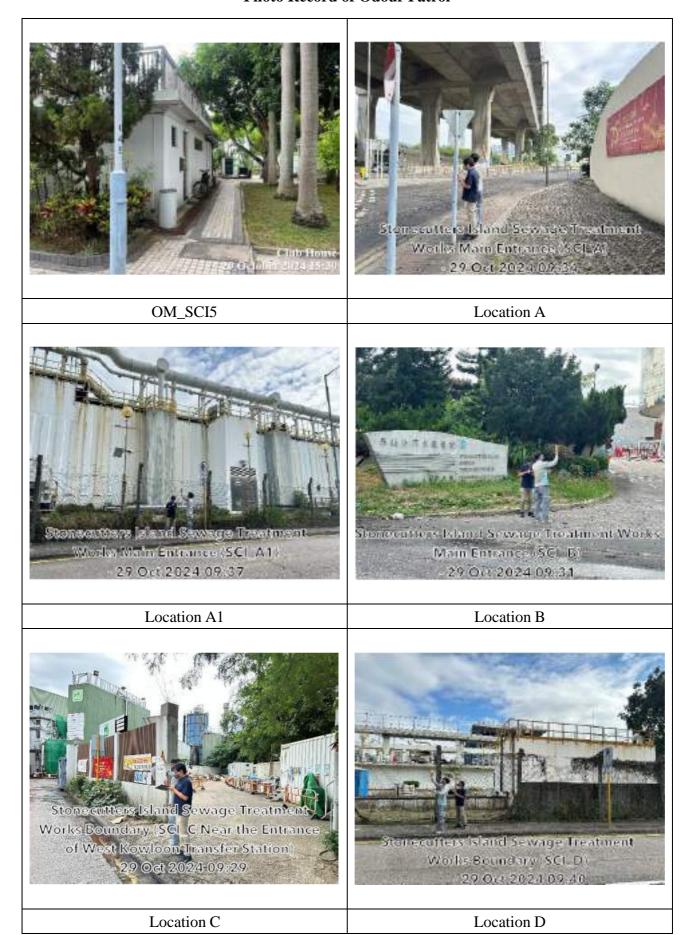

Odour M	Innitaring R	Report for Harbour	Area Treatment Sc	heme Stage 2A	(Operational Pha	se) October 2024
Ouvui M	wiiwi me r	Nebuli ivi ilalikuli i	Aica iicaunciii oc	Heme Diage 2A	William and the state of the st	3C/ \/\UUUUCI 4V47


Appendix D

Meteorological Information from the Hong Kong Observatory Station

Meteorological Information from the Hong Kong Observatory Station

- Temperature and Humidity

Tempearture/Humidity:

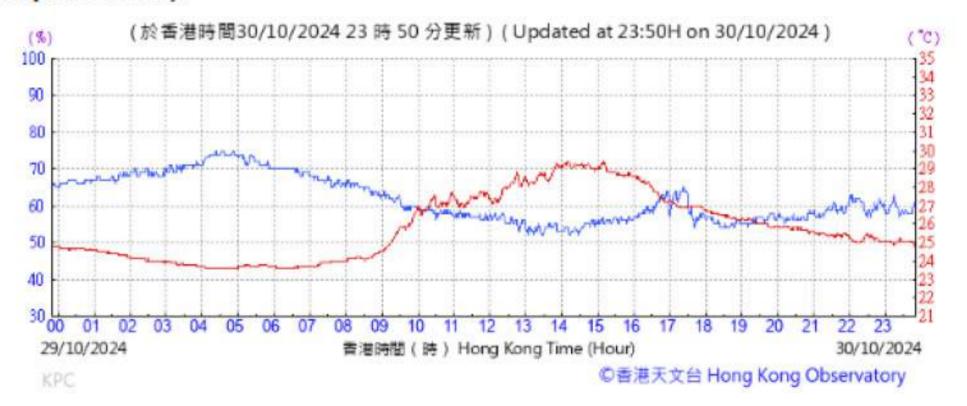

Reference from:

 $\underline{https://www.hko.gov.hk/en/wxinfo/ts/display_graph.htm?hko\&}$


&

https://i-lens.hk/hkweather/daily_extract.php?date=2024-10-29

Wind Direction



- Wind Speed

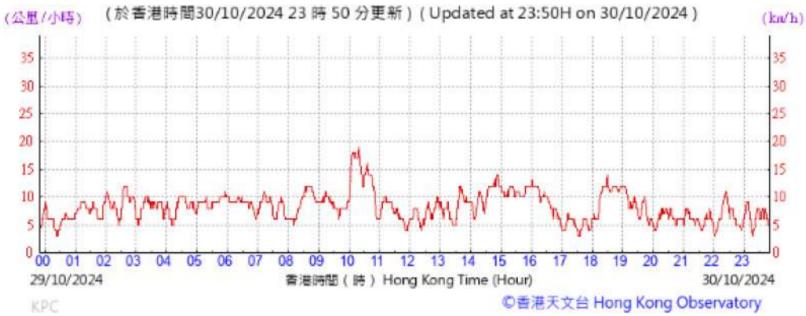


Odour M	Innitaring R	Report for Harbour	Area Treatment Sc	heme Stage 2A	(Operational Pha	se) October 2024
Ouvui M	wiiwi me r	Nebuli ivi ilalikuli i	Aica iicaunciii oc	Heme Diage 2A	William and the state of the st	3C/ \/\UUUUCI 4V47

Appendix E

Layout of Odour Monitoring Locations for Odour

Measurement

Monitoring Location of Deodourization Unit in SCISTW

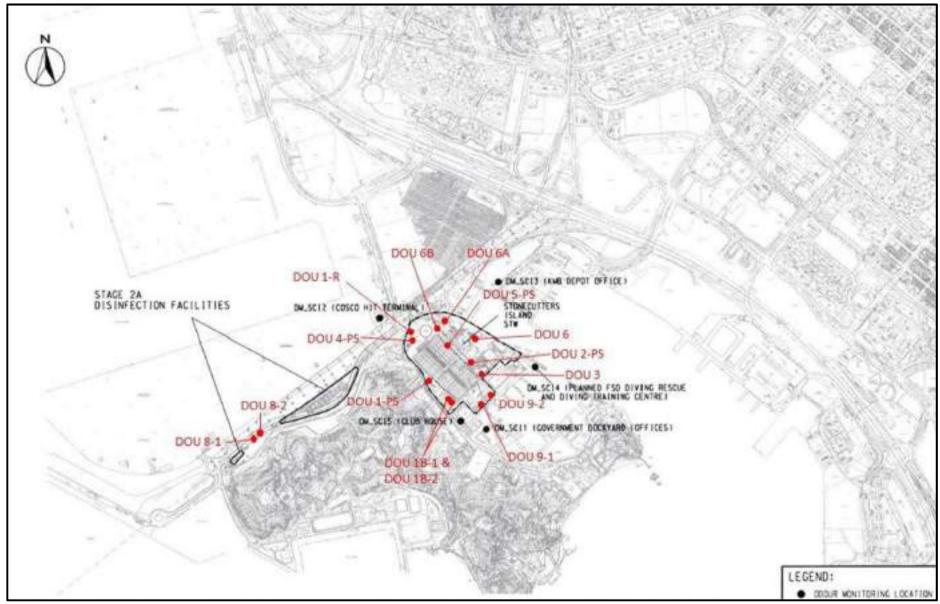

Remark:

1. DOU 3 stated on map was replaced by DOU 2PS-ACF.

Sampling Location Photos

29 October 2024 11: 45	29 October 2024 1:55	29 October 2024 14:00	29 October 2024 14-40
DOU 1B-1	DOU 1B-2	DOU 1-PS	DOU 1-R
29 October 2024 10:50	29 October 2024 10:30	20 Ortober 2024 142.8	29 October 2024 09:55
DOU 2-PS	DOU 2PS-ACF	DOU 4-PS	DOU 5-PS

Sampling Location Photos



Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

Appendix F

Odour Measurement Result

Sampling Record - SCI STW

Sampling Location	Date	Time	$\begin{array}{c} \textbf{Odour} \\ \textbf{Concentration} \\ \textbf{(OU}_{E}/\textbf{m}^{3}) \end{array}$	H ₂ S Concentration (ppb)	Temperature (°C)	Humidity (%)	Wind Speed (m/s)	Wind Direction	Duct Volumetric Flow Rate (m³/hr)	Odour Emission Rate (OU/s)
DOU 1B-1		11:45	<11	<1	30.9	54.1	0.8	SW	5,736	18
DOU 1B-2		11:55	<11	<1	30.9	53.8	1.1	SW	5,703	17
DOU 1-PS		14:00	<11	<1	30.8	52.2	0.3	S	44,215	135
DOU 1-R		14:40	<11	<1	31.3	50.6	0.5	S	2,837	9
DOU 2-PS		10:05	<11	<1	28.8	54.7	1.0	Е	33,966	104
DOU 2PS-ACF		10:30	<11	<1	28.8	56.2	0.8	Е	38,191	117
DOU 4-PS	024	14:20	<11	<1	30.6	51.2	0.3	SW	15,098	46
DOU 5-PS	29-Oct-2024	9:55	<11	<1	29.0	52.8	1.3	SW	16,851	51
DOU 6	29-(10:15	<11	<1	29.6	52.5	1.2	SE	25,793	79
DOU 6A		9:30	<11	<1	28.1	69.6	0.8	Е	22,231	68
DOU 6B		9:40	<11	<1	29.0	65.1	0.7	SW	23,639	72
DOU 8-1		15:10	<11	<1	31.3	51.6	0.8	Е	3,403	10
DOU 8-2		15:30	<11	<1	31.3	51.8	0.5	Е	3,403	10
DOU 9-1		11:15	25	146	30.2	56.8	0.5	N	4,838	34
DOU 9-2		11:25	<11	37	30.3	56.2	0.5	N	6,912	21
							Total	Odour emission	on rate (OU/s)	791

Odour M	Innitaring R	Report for Harbour	Area Treatment Sc	heme Stage 2A	(Operational Pha	se) October 2024
Ouvui M	wiiwi me r	Nebuli ivi ilalikuli i	Aica iicaunciii oc	Heme Diage 2A	William and the state of the st	3C/ \/\UUUUCI 4V47

Appendix G

Total Odour Emission Rate Extracted from EIA Report

	our ou/s		ur ou/s				
Facility	Unmitigated odour Emission Rate, ou/s	Deodourizer Discharge ID	Discharge Height, m	Total Discharge Cross-sectional Area, m²	Discharge velocity, m/s	Total no. of discharge point	Mitigated Odour Emission Rate, ou/s
Option 2 - Decentralized Des	ign						
CEPT Facilities (Odd No.	146162.21	S-O2-DO1	12	1.86	20	1	4384.87
Units) & Flow Distribution							
Channel)							
CEPT Facilities (Even No.	136086.21	S-O2-DO2	12	1.86	20	1	4082.59
Units) & NWKPS +							
NWKPS O/F chamber							
Sludge TreatmentFacilities	19057.82	S-O2-DO3	6	2.40	12.58	3	571.73
(include Sludge Storage							
Tanks, Sludge Dewatering							
Building 1 & 2, Existing							
and New Sludge Cake							
Silos)							
Stage 1 MPS & Riser Shaft	6518.89	S-O2-DO4	18	1.13	12.28	4	195.57
Stage 2A MPS & Riser	6518.89	S-O2-DO5	18	1.13	12.28	4	195.57
Shaft							
NWKPTW	19963.88	S-O2-DO6	6 13 2.26		12.28	8	598.92
Flow DistributionChambers	2688.01	S-O2-DO7	4.5	4.5 0.32		2	80.64
New Flow Distribution							
Chamber							
Chlorination Contact Tank	37776.64	S-C-DO1	11	11 1.13 7.2		4	1133.30
Drop Shaft and Chamber	2630.22	S-C-DO2	4	4 0.57 8.84		2	263.02
15A							

Note: (1) CEPT facilities include Influent upflow structure, distribution channel, flocculation tanks, sedimentation tanks and effluent weirs, drop shafts, scum pit and rapid mixing tank of sedimentation tanks

- (2) MPS is Main Pumping Station
- (3) NWKPTW, NWKPS and NWKO/F chambers are North West Kowloon PTW, NWKPTW Pumping Station and NWKPTW Overflow Chamber, respectively
- (4) The emission rate included a 1.31 ambient temperature correction factor.

Total Mitigated Odour Emission Rate, ou/s: 11,506.21

Reference:

https://www.epd.gov.hk/eia/register/report/eiareport/eia_1482008/EIA/pdf/Text/S3%20Air.pdf

Odour Monitoring Report for Harbour Area Treatment Scheme Stage 2A (Operational Phase) October 2024

Appendix H

Investigation Report

Harbour Area Treatment Scheme Stage 2A (Operational Phase) Investigation Report on Action Level or Limit Level Non-compliance (October 2024)

Monitoring Date of 29th October 2024

According to Table 2.3 of EM&A Manual, the Action and Limit Levels of Odour Patrol are shown below:

Parameter	Action	Limit		
Odour Nuisance	Odour Intensity of 2 is measured from odour patrol	Odour Intensity of 3 or above is measured from odour patrol		

Exceedance Odour Patrol Results

3.6		Level Exceedance			
Monitoring Location					
Location	0-1	O-2	0-3	O-Mean	Enecodance
Sandy Bay PTW Boundary	2#	2#	2#	<u>2</u> #	Action

Remark:

- 1. # The odour was detected with sewage or urine characteristics.
- 2. @The odour was detected with garbage characteristics.

Investigation Results:

- a) Causes of exceedances
- With reference to on-site observation, the odour characteristics, potential odour sources, and photo records of Sandy Bay PTW Boundary are listed below:

I agotion ID	On-Site Observation					
Location ID	Odour Characteristics	Potential Odour Source				
Sandy Bay PTW Boundary	Sewage	PTW				





Sandy Bay PTW Boundary

- A distinct sewage odour was detected within the Sandy Bay PTW Boundary and was accompanied by a continuous downwind. It was identified that the operation of loading the removed screening waste and grit onto vehicles at Sandy Bay PTW was taking place, which may be one of the factors associated with the detected sewage characteristics. Due to inconclusive results, an odour patrol at this location is proposed to confirm the significance of the odour nuisance from Sandy Bay PTW and determine if it is an isolated incident.
- An investigation was conducted by DSD to identify the reason/source of the exceedance. Odour nuisance was the only recorded issue. To determine the cause, the performance of the deodorization units and the internal monitoring data were checked. No abnormalities were recorded, and thus the reason for the exceedance cannot be defined. Mitigation measures will be implemented if the exceedance is recorded again at the same monitoring stations or if any abnormalities are detected.
- To confirm the findings and conclusions, an additional odour patrol at Sandy Bay PTW Boundary was conducted on 22nd November 2024. The field record and photo record during the patrol are attached in **Annex 1**. On 22nd November 2024, the odour intensity was 0 for all three panelists. The odour level was deemed acceptable, and thus the exceedance recorded on 29th October 2024 was considered an isolated incident. Operators are reminded to maintain the equipment and plants in good condition and to closely monitor the performance of the deodorization units.
- b) Action required under the Event/Action plan. Refer to Table 2.5 of the EM&A Manual.

c) Action taken under the Event/Action plan

Person-in-charge of Odour Monitoring	DSD			
1. After considered the above-mentioned investigation results, the exceedances are	1.&2. Investigation had been carried out within 2 weeks as shown above.			
non-project related or occasional. 2. Odour patrol at Sandy Bay PTW Boundary is repeated on 22 nd November 2024	3. Mitigation measures will be implemented if the exceedance is recorded again on the same monitoring stations for the next monitoring.			

d) Conclusions and Recommendations for Mitigation

All plants and deodorization units were checked and found to be in normal condition. It is recommended to pay closer attention to Sandy Bay PTW and implement additional mitigation measures if necessary to better manage the odour emanating from Sandy Bay PTW.

Odour	Monitoring 1	Report for Harbour	Area Treatment Schem	e Stage 2A (On	erational Phase)	October 2024
V AUOUI	MICHILLOI III2 I	Neboli ioi Halboul	ATEA TTEAUHEIL SCHEIL	IC MIASE AA IUU	ei autonai i nase <i>i</i>	VCUUDEL 2025

Annex 1

Field Record and Photo Record for Additional Odour $Patrol \ on \ 22^{nd} \ November \ 2024$

Harbour Area Treatment Scheme Stage 2A (Operational Phase) Investigation Report on Action Level or Limit Level Non-compliance (October 2024)

Monitoring Result of Odour Patrol on 22^{nd} November 2024

	Panellist W		Time	Temperature	Humidity Speed	Wind Direction	Odour Intensity		D: //	On-Site Observation		
Location ID		Weather						Duration of Odour	Direction from Source	Odour Characteristics	Potential Odour Source	
Sandy Bay	1							0				
PTW	2	Cloudy	10:51	21.5	69.0	2.4	NW	0	NA	NA	NA	NA
Boundary	3							0				





Sandy Bay PTW Boundary